

SPECIFICATION SHEET

JFW MODEL 50T-730

TERMINATION

JFW Industries, Inc.
Phone: 317-887-1340
sales@jfwindustries.com
www.jfwindustries.com

Frequency Range DC-26.5 GHz

Impedance 50 Ohms nominal

VSWR 1.35:1 maximum
< 1.25:1 typical


RF Input Power 10 Watts average @ +25°C
Derate to 0 Watt @ +125°C

Peak Power 100 Watts
(5 microsecond pulse, 1% duty cycle)

RF Connector SMA male or SMA female

Temperature Range -55°C to +125°C

Outline Drawing Numbers 092-10278 (SMA male)
092-10278-01 (SMA female)

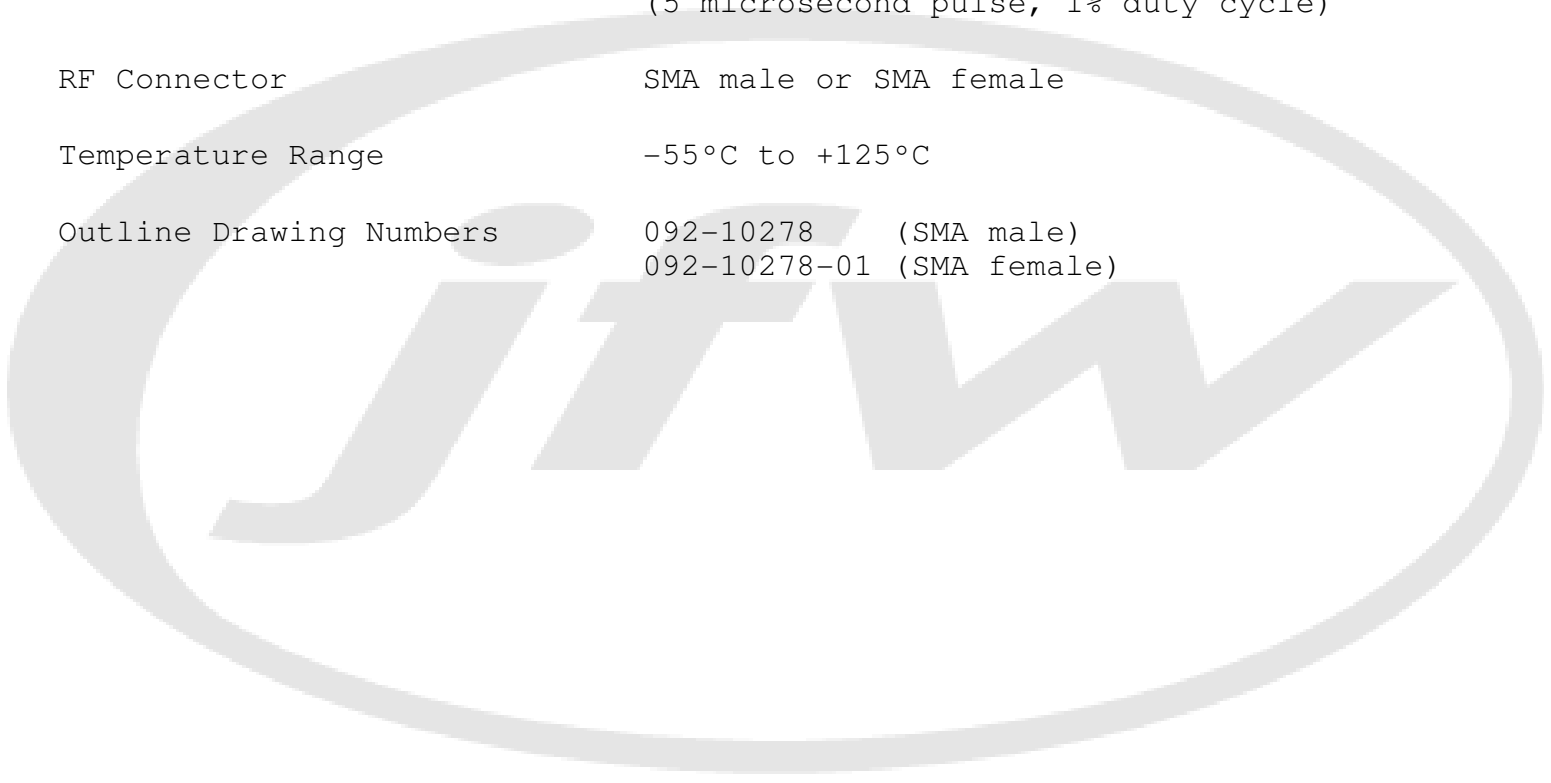

ECR/ECN #	DATE	REV	APPR / DATE	ECR/ECN #	DATE	REV	APPR / DATE
	04/22/2024		CLK 04/22/2024				
33555	08/13/2024	A	TRS 08/13/2024				